

# 500°F ELECTRICALLY RESISTANT EPOXY

## Cures at Room Temp. to Bond, Pot, Seal and Protect

### 500°F - Duralco™ 4525 & 4525IP

Easy to use. Just mix and apply.

No volatiles. No solvents. No out-gassing.

Duralco 4525 cures at room temp. (or in 5 minutes at 250°F) to provide high bond strength, high temp. stability, low shrinkage, excellent chemical, electrical and radiation resistance and low moisture absorption.

It maintains its high electrical resistance over long periods of time and has the lowest moisture absorption available when compared to 23 commercially available epoxies. (This application has been approved by UL).

Duralco 4525 is ideal for high performance bonding, potting, sealing, repairs, castings and jigs. Forms protective coatings.

Commonly found in electronics, appliances, instrumentation, motors, equipment, etc.

#### Users Report:

##### High Resistance Even in High Humidity

Used to seal thermocouples, electric heaters and critical electronic components for use in high humidity environments. Tests show less than 10% of the moisture transmission of silicones or competitive epoxies.

##### Proven in Instrumentation Applications

Used for fabrication of end seals and installation of thermocouples, pressure, strain gauges and flow measuring instruments.

##### Excellent Corrosion Resistance

Used to repair glass lined tanks for use in 36% Hydrochloric, 29% Phosphoric, 65% Sulfuric and 70% Nitric Acids, 25% Caustic, 30% Chrome Oxide solutions. Competitive epoxies disintegrated in less than 24 hours.

##### Bonds Carbon to Steel and Remains in use for 5 years

Used to bond carbon blocks to steel for bearings in a rotating kiln at 300°F. Bonds brake pads.

##### Fast Cures

Independent tests have shown 95% cure in 15 minutes at 200°F and 100% cure in 5 minutes at 250°F, enabling high speed production applications.

#### Availability:

Cat. No.	Description	Temp.
Duralco 4525-1	Pint Kit. . . . .	500 °F
Duralco 4525-2	Gallon Kit. . . . .	500 °F
Duralco 4525IP-1	Pint Kit. . . . .	500°F
Duralco 4525IP-2	Gallon Kit. . . . .	500°F

#### Pre-Measured Kit

**Each Unit Contains:** 1 jar of resin, 1 syringe of hardener and 1 mixing stick.  
(See page 19 for details)


EE 4525-10	10 Epox-Eez 10 gm units/box
EE 4525-25	10 Epox-Eez 25 gm units/box
EE 4525IP-10	10 Epox-Eez 10 gm units/box
EE 4525IP-25	10 Epox-Eez 25 gm units/box

Also available in **Epox-Eez Twin Pack Cartridges**


**Quantity Prices & Custom Formulations**  
**Available on Request**



**4525 Bonds a 316 S.S. Shaft to a Ceramic Piston  
Repairing a High Temperature Acid Pump**

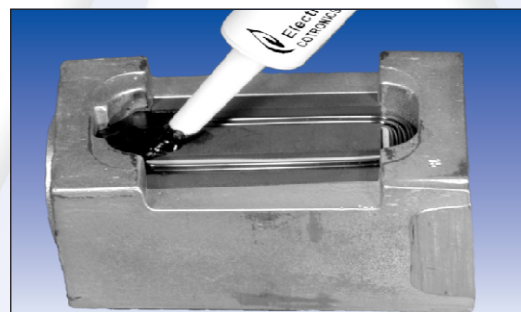

**Duralco 4525 Insulates, Seals and  
Moisture-Proofs a Hi- Temp Instrument**

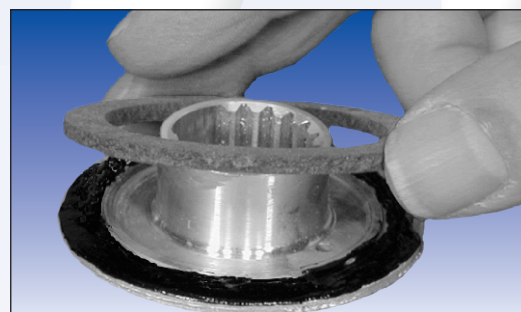

**Duralco 4525 Bonds a Hi-Temp. Brake Assembly**

Duralco™	Units	4525	4525IP
Maximum Temp	°F	500	500
Components	Color	2-Black	2-Black
Mixed Viscosity	cps	12,400	24,000
Hardness	Shore 'D'	90	90
Tensile Strength	psi	10,000	10,900
Thermal Cond.	Btu-in/Hr.Ft <sup>2</sup> °F	13	13
Thermal Exp.	10 <sup>-5</sup> /°C	3.3	3.1
Dielectric Strength	volts/mil.	450	425
Volume Resistivity	ohm-cm	10 <sup>15</sup>	10 <sup>15</sup>
Heat Distortion	°C	210	213
Elongation	%	2	2
Thermal Stability	% 1000 hr @ 200°C	0.05	0.05
Shrinkage	% max.	0.2	0.2
Moisture Abs.	% after 30 Days	0.1	0.1
Mix Ratio	R / H	100/8	100/8-12
Cure	Hr. @ R. T.	16 - 24*	16-24*
Optimum Properties	Post cure hrs. @250°F	1	1
	and hrs. @350°F	1	1